
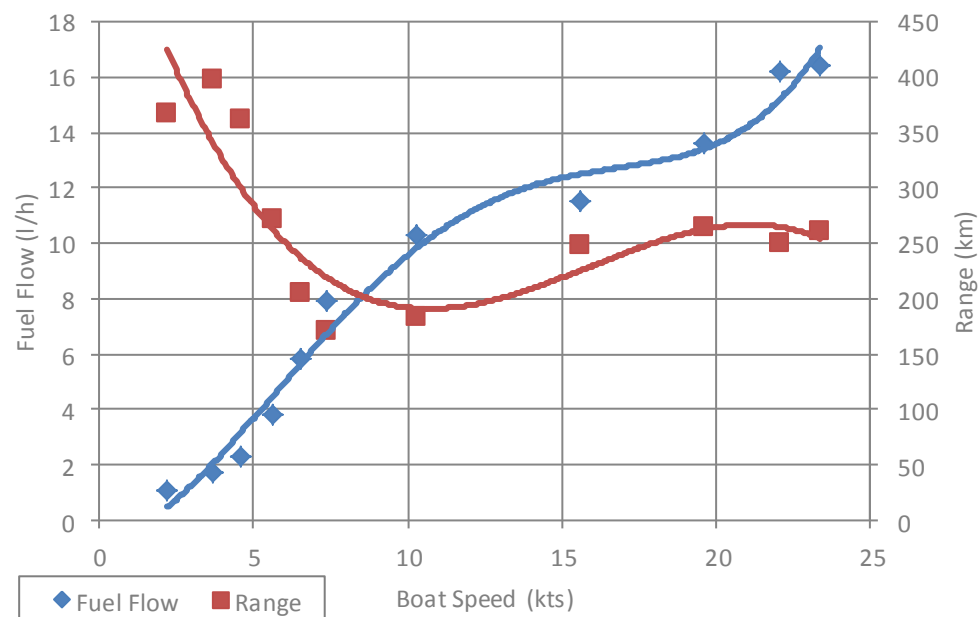


Model 555 Open
 Engine(s) Mercury 50 Four Stroke
 HP / kW 50 / 36.8
 Gear Ratio 1.83:1
 Propeller Black Max 10 7/8 x 11 x 3 BL AL
 Propeller PN 85632A45

Dry Weight 898 kg
 Test Weight 1195 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	2.2	1.1	367
1500	3.7	1.7	399
2000	4.6	2.3	363
2500	5.7	3.8	273
3000	6.5	5.8	205
3500	7.4	7.9	171
4000	10.3	10.3	183
4500	15.6	11.5	249
5000	19.6	13.6	264
5500	22.1	16.2	250
5730	23.4	16.4	262

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.


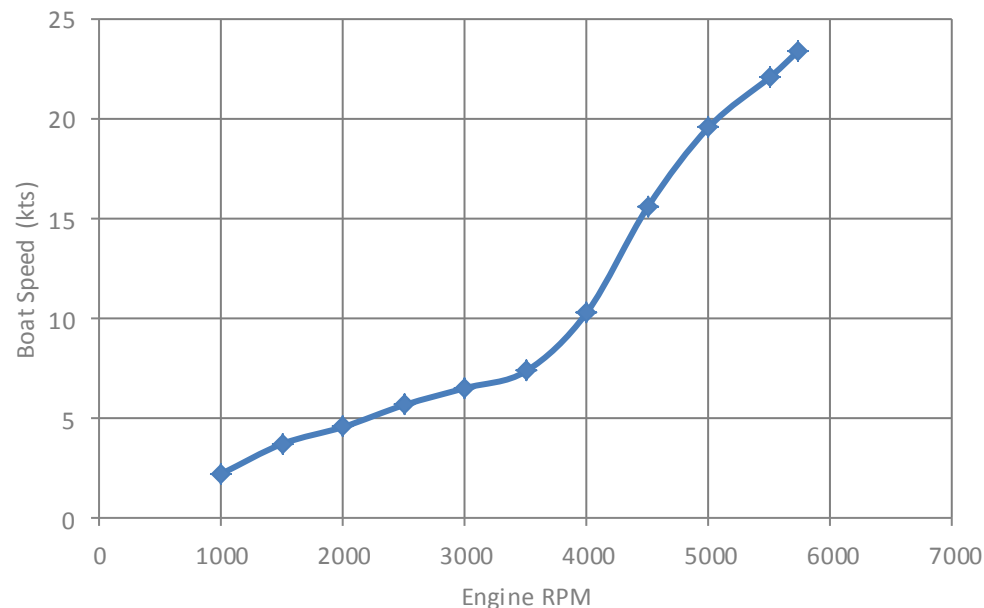


Model 555 Open
 Engine(s) Mercury 60 Four Stroke
 HP / kW 60 / 44.1
 Gear Ratio 1.83:1
 Propeller Black Max 10 7/8 x 11 x 3 BL AL
 Propeller PN 85632A45

Dry Weight 898 kg
 Test Weight 1195 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.0	1.2	458
1500	4.1	1.9	391
2000	5.1	2.3	403
2500	5.7	4.1	255
3000	6.4	5.7	204
3500	7.2	8.1	163
4000	10.2	10.2	182
4500	15.6	11.6	247
5000	19.5	13.7	260
5500	22.5	15.9	259
6050	25.6	20.9	224

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

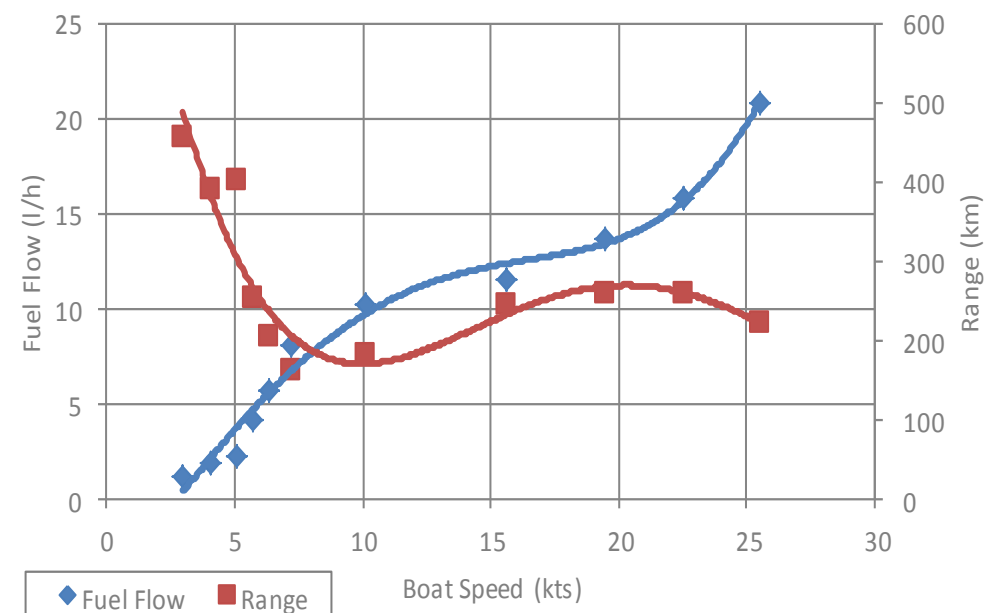
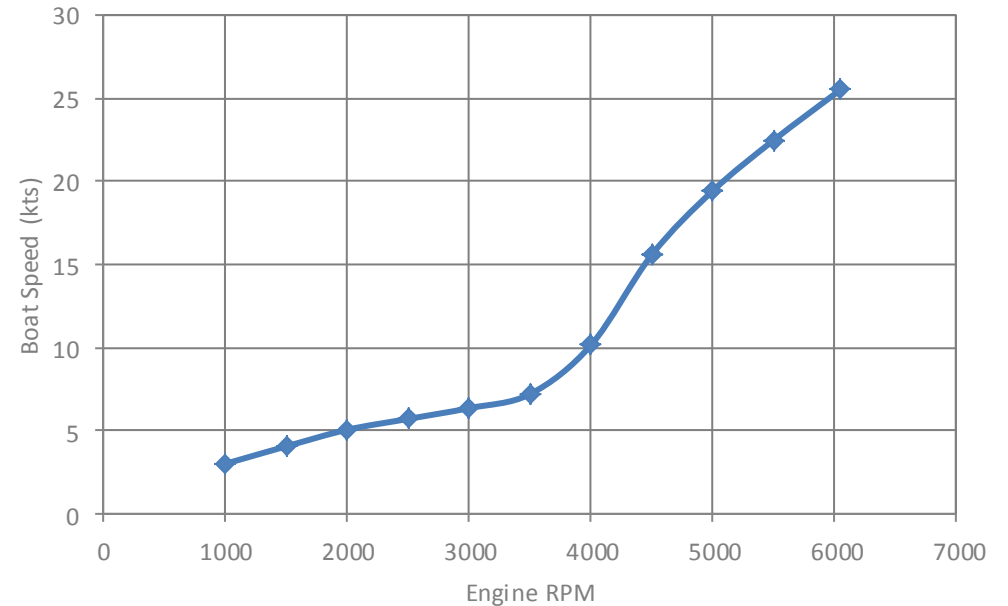


Model 555 Open
 Engine(s) Mercury 60 Four Stroke Command Thrust
 HP / kW 60 / 44.1
 Gear Ratio 2.33:1
 Propeller Black Max 14 x 13 x 3 BL AL
 Propeller PN 77340A45

Dry Weight 902 kg
 Test Weight 1199 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	2.8	1.3	388
1500	4.0	1.7	431
2000	5.1	3.1	302
2500	6.0	4.2	260
3000	7.1	6.8	190
3500	9.8	9.1	196
4000	14.3	11.1	236
4500	18.0	13.4	246
5000	21.0	15.2	253
5500	23.4	17.8	241
5810	24.7	18.2	248

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

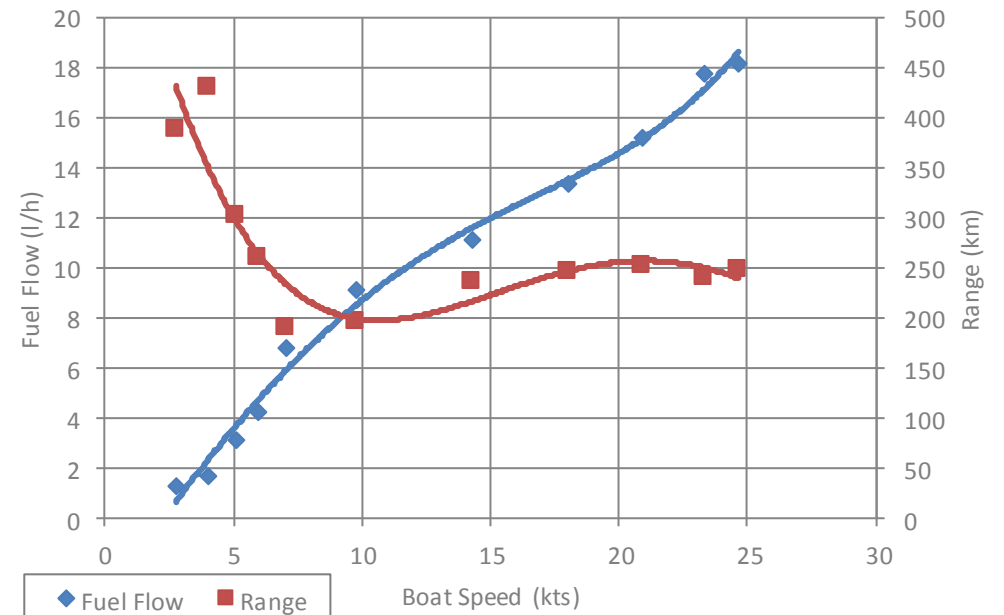
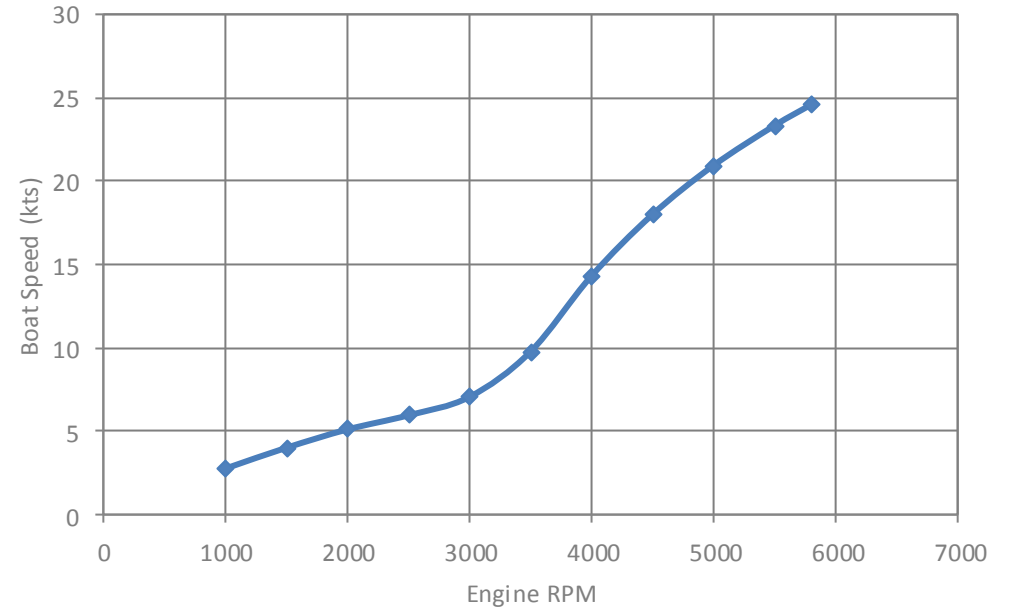


Model 555 Open
 Engine(s) Mercury 80 Four Stroke
 HP / kW 80 / 58.8
 Gear Ratio 2.07:1
 Propeller Spitfire 13.8 x 13 x 4 BL AL
 Propeller PN 8M8026570

Dry Weight 950 kg
 Test Weight 1247 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.2	2.6	226
1500	4.5	3.4	243
2000	5.8	5.1	209
2500	6.6	7.4	164
3000	8.3	9.8	154
3500	13.4	12.7	193
4000	18.3	16.5	203
4100	19.0	17.1	204
4500	21.9	19.2	209
5000	24.5	22.0	204
5440	27.0	28.1	176

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

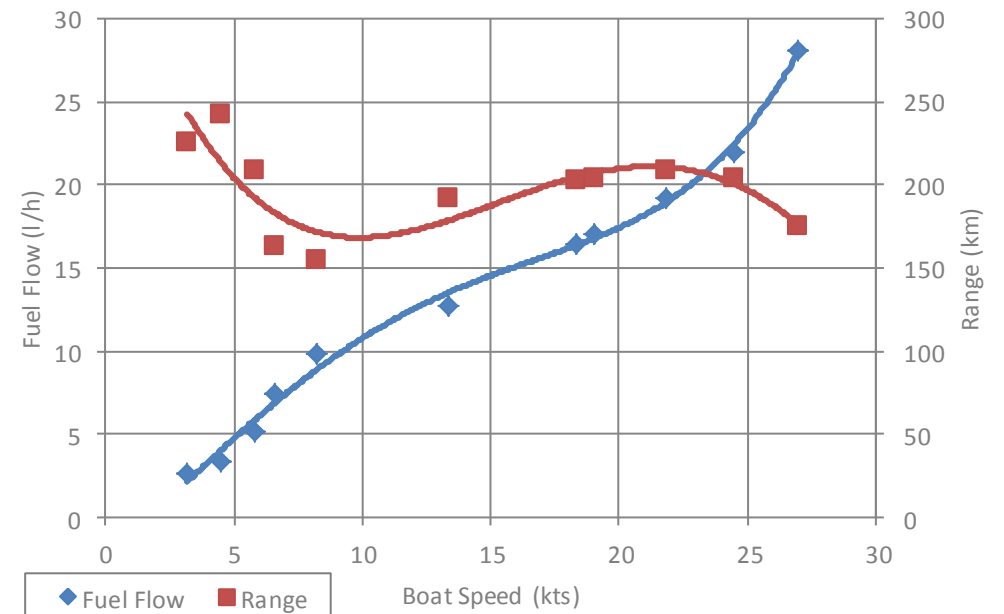
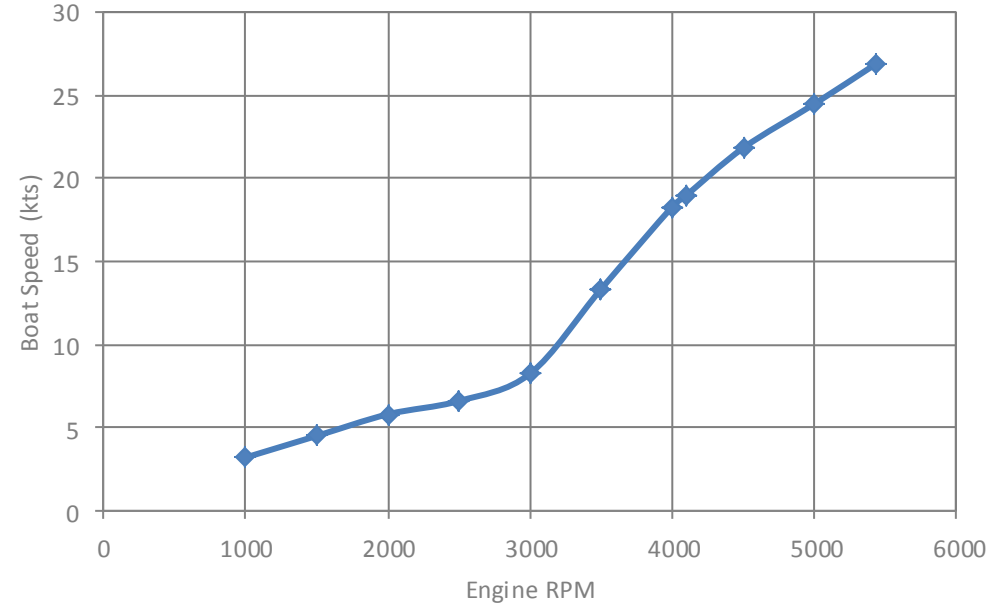


Model 555 Open
 Engine(s) Mercury 100 Four Stroke
 HP / kW 100 / 73.6
 Gear Ratio 2.07:1
 Propeller Spitfire 13.4 x 15 x 4 BL AL
 Propeller PN 8M8026580

Dry Weight 950 kg
 Test Weight 1247 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.4	2.3	271
1500	5.0	4.3	213
2000	6.1	6.1	182
2500	7.2	8.2	160
3000	10.2	10.6	176
3500	16.7	12.8	238
4000	20.9	18.2	210
4500	24.5	22.1	203
5000	27.3	24.2	206
5500	30.8	29.7	190
6030	33.0	34.2	177

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

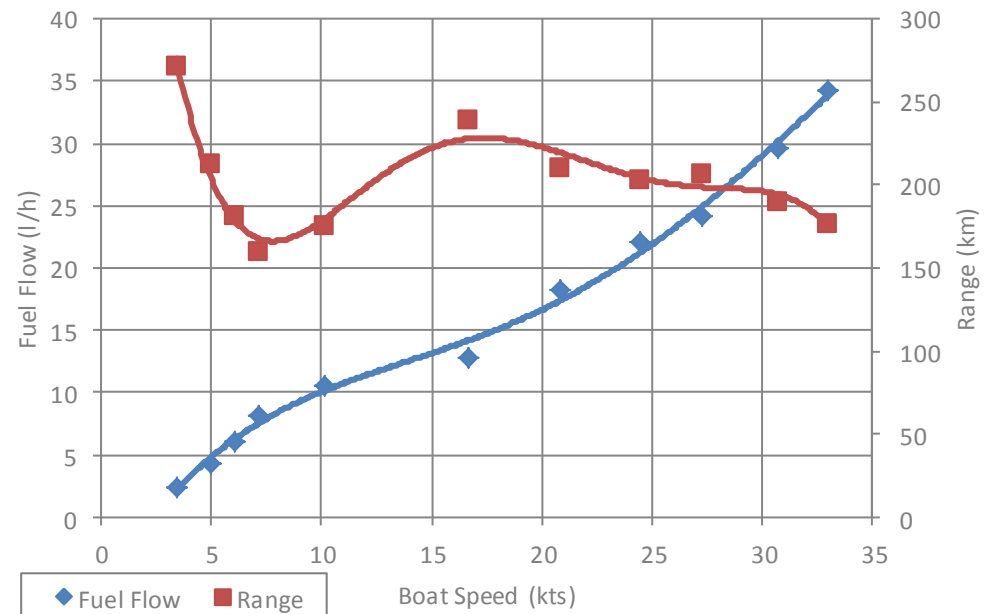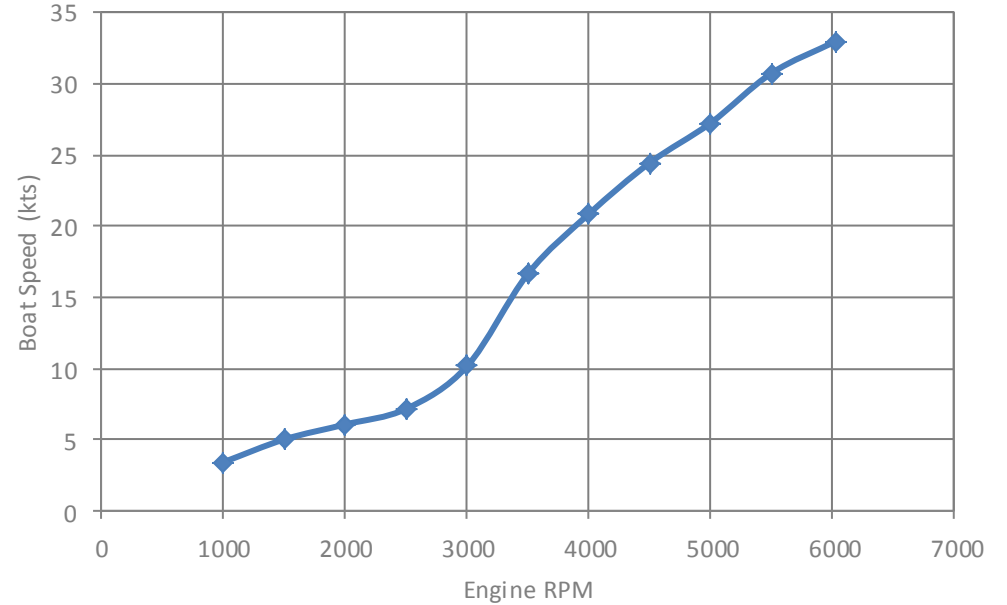

Model 555 Open
 Engine(s) Mercury 115 Four Stroke
 HP / kW 115 / 84.6
 Gear Ratio 2.07:1
 Propeller Spitfire 13 x 17 x 4 BL AL
 Propeller PN 8M8026590

Dry Weight 950 kg
 Test Weight 1247 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.7	2.2	304
1500	5.3	4.1	237
2000	6.4	6.3	185
2500	7.9	9.0	161
3000	12.9	11.5	205
3500	19.5	14.3	250
4000	23.5	19.2	224
4500	27.3	25.3	197
5000	31.2	31.0	185
5500	34.7	38.4	165
5980	37.6	43.0	160

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

